

UFO

# Specification Sheet

CK-20  
( MAP-5769 )

High-Performance Plastic Optical Fiber

E s k a™

**mitsubishi**  
**RAYON CO.,LTD.**

Plastic Molding Material Department

1-1, Marunouchi 1-Chome, Chiyoda-ku, Tokyo 100-8253, Japan

Phone :+81-3-6748-7521

Facsimile:+81-3-3286-1384

1. Scope

The specification covers basic requirements for the structure and optical performances of CK-20.


2. Structure

Table 1

CK-20

Item		Specification			
		Unit	Min.	Typ.	Max.
Optical Fiber 1	Core Material	—	Polymethyl-Methacrylate Resin		
	Cladding Material	—	Fluorinated Polymer		
	Core Refractive Index	—	1.49		
	Refractive Index Profile	—	Step Index		
	Numerical Aperture	—	0.5		
	Core Diameter	μm	455	485	515
	Cladding Diameter	μm	470	500	530
Approximate Weight		g/m	0.2		

Sectional View

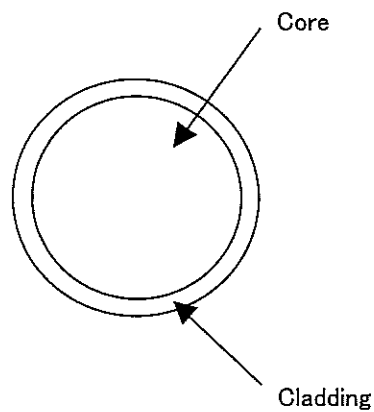

## 3. Performances

Table 2

Item		Acceptance Criterion and/or [ Test Condition ]	CK-20			
			Specification			
			Unit	Min.	Typ.	Max.
Maximum Rating	Storage Temperature	No Physical Deterioration [ in a Dry Atmosphere ]	°C	-55	-	+70
	Operation Temperature	No Deterioration in Optical Properties* [ in a Dry Atmosphere ]	°C	-55	-	+70
		No Deterioration in Optical Properties** [ under 95%RH condition ]	°C	-	-	+60
Optical Properties	Transmission Loss	[ 650nm Collimated Light ] [ Standard condition ] [ 10m-1m cutback ]	dB/km	-	-	250
Mechanical Characteristics	Minimum Bend Radius	Loss Increment $\leq 0.5$ dB [ A Quarter Bend ]	mm	10	-	-
	Tensile Strength	Tensile Force at 5% Elongation; in Conformity to the JIS C 6861 ]	N	14	-	-

All tests are carried out under temperature of 25°C unless otherwise specified.

\* Attenuation change shall be within +/- 10% after 1,000 hours.

\*\* Attenuation change shall be within +/- 10% after 1,000 hours, except that due to absorbed water.

## 4. Revision

REVISION No.	DATE	REMARK	DRAWN	APPVD
	Oct 7, 2011	new issue	Takenaka	Okita