

## Bloom MX LED Downlight




The UFO Bloom MX features a sleek design, easy installation and magnetic articulation for 360° rotation and 90° tilt.

With a body of 25mm in diameter and a stalk of 21.5mm in length, the surface mountable Bloom MX is the larger of the two fittings in this range. It features a cleverly designed magnetic ball joint that provides complete freedom of movement, allowing the luminaire to be fully rotated and tilted to point the light in almost any direction.

Available with a choice of colour temperatures, high colour rendition, and a selection of optics, the diminutive fitting provides contemporary, functional lighting in any indoor environment.

Depending on the driver specified, the MX can be dimmed using any of multiple options.

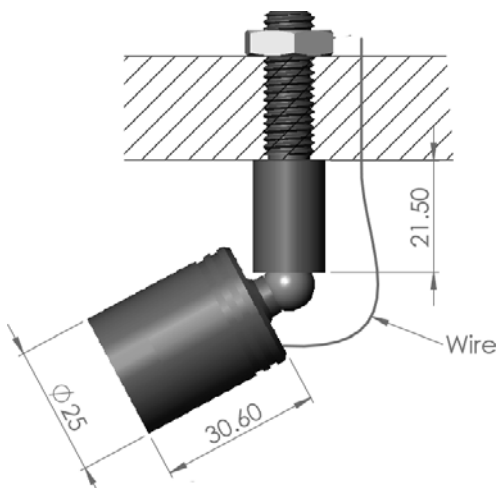

### GENERAL INFORMATION

Light Source	White light LED
Operating Environment	Indoor use
Material	Aluminium
Finishes	Black, white, silver, custom RAL colour
Dimensions	Body $\varnothing$ 25mm x 31mm Stalk: $\varnothing$ 14mm x 21.5mm
Weight	46g
Securing Method	Secured with M10 back nut

### ARTICULATION


Rotation	360°
Tilt	90°

### LED ARRAY DATA

LED Type	Osram Oslon Square on 20mm Alu Star PCB
LED Life (L70, B10)	>54,000 Hours
Fitting Drive Current	350mA or 500mA
Power Consumption	1W @ 350mA / 1.5W @ 500mA
Colour Temperature Options	2700K, 3000K, 4000K
CRI	>95
Lumen Output	100lm @ 350mA / 140lm @ 500mA
LED Luminous Efficacy	98lm/W
Driver Type	Constant Current LED Driver Required

### OPTICS DATA

Optics Family	Carclo 20mm
Available Optics	13.5° / 19° / 28° With adaptor can also use 16°, 23°, 36°, 61°, 80°, 45°x20°, 20°x50°

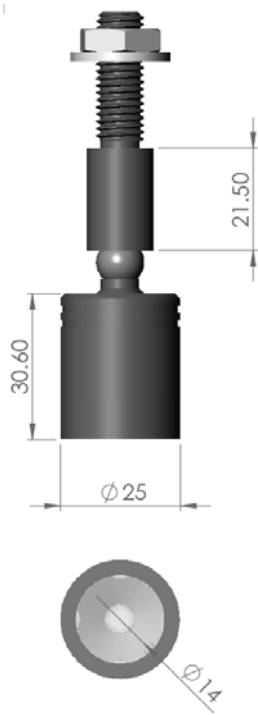

## DRIVER DIMMING OPTIONS (Depending on specified driver)

Driver Specific	None 0-10V DALI DMX Mains Local Potentiometer Remote Potentiometer
-----------------	--

## ACCESSORIES

Optional Accessories	Extended Snoot Directional Snoot Honeycomb Louvre Diffuser
----------------------	---

## PRODUCT CODES

MODEL	OPTICS		COLOUR TEMP		FITTING COLOUR		ACCESSORIES		ACCESSORIES 2	
UFO BLM MX	13.5°	13	2700K	27	Black	BL	Standard Snooth	SS	None	XX
	19°	19	3000K	30	Silver	SV	Extended Snoot	EX	Honeycomb	HC
	28°	28	4000K	40	White	WH	Directional Snoot	DS	Diffuser	DF
	16°	16			Custom	CU			Both Options	HD
	23°	23								
	36°	36								
	61°	61								
	80°	80								
	45° X 20°	45								
	20° X 50°	20								

UFO BLM-MX - [ ] - [ ] - [ ] - [ ] - [ ]

e.g. UFO BLM-MX-19-30-SV-SS-XX

Specify RAL code for custom colour

