

# PRODUCT SPECIFICATION SHEET




Rev. C1

## LPV1 LED Downlight



Surface mount LED downlight fitting with free rotation and tilt. The UFO LPV1 fitting features a sleek design and 360° rotation with 90° + 45° articulation in the pivot.

Available in a choice of colour temperatures with high colour rendition and a selection of optics, the fitting can be used to provide contemporary, functional lighting in any environment. The fitting has an inbuilt plug/socket and can be easily removed from its base.

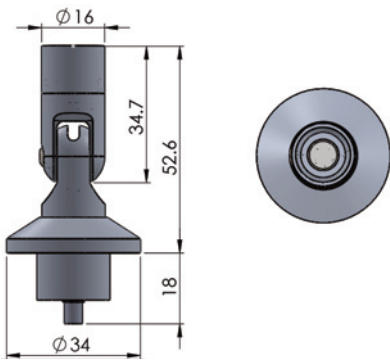

### TECHNICAL INFORMATION

Colour Temperatures	3000K, 4000K
Typical CRI Values	96CRI (3000K) 95CRI (4000K)
Power Consumption	350mA (1.12W) 500mA (1.6W)
Voltage	3.2V nominal
Lumens per Watt	3000K - 51lm/W 4000K - 54lm/W
Lens Options	16° / 23° / 36° / 61°
Material	Aluminium
Finishes	Black, silver, white or custom RAL colour
Articulation	Tilt: 90°+45° / Rotation: 360°

### DRIVER CONTROL OPTIONS (Depending on specified driver)

No Dimming	Local Potentiometer Dimming
0-10V Dimming	Remote Potentiometer Dimming

### PRODUCT ORDERING CODES

MODEL	OPTICS		COLOUR TEMP		FLANGE COLOUR	
UFO LPV1	16°	16	3000K	30	Black	BL
	23°	23	4000K	40	Silver	SV
	36°	36			White	WH
	61°	61			Custom	CU
UFO LPV1	-	-	-	-	-	-

e.g, UFO LPV1-16-30-BL



Universal Fibre Optics Ltd  
Home Place \ Coldstream  
TD12 4DT \ UK  
+44 (0)1890 883416 \ www.ufo.lighting

Universal Fiber Optic Lighting USA, LLC  
1749 Northgate Blvd  
Sarasota \ FL34234 \ USA  
941-343-8115 \ www.fiberopticlighting.com

UFO Licht GmbH  
Friendsfactory AG \ Gutenbergstraße 1  
85737 Munchen \ Deutschland  
+49 (0)9491 955880 \ www.ufo-licht.de