



# UFO PICCOLO LED TRACK LIGHTING PRODUCT SPECIFICATION SHEET

Rev. D1 UK

The new Piccolo track lighting system from UFO combines our popular and diminutive Pico fittings with a choice of 3 different profiles of lighting track.

Featuring fittings with a choice of 2 popular colour temperatures and a high CRI, together with an easily adjustable focusing optic, the Piccolo track is perfect for illuminating small objects or for highlighting specific points of interest. To further aid in this, each fitting on the track can be rotated by 180° and offers a wide 130° of tilt.

Depending on the driver specified, the Piccolo can be dimmed using any of multiple options allowing it to seamlessly blend into almost any existing lighting scheme.

Please note that the Piccolo system is fully built by UFO in-house. Track lengths and spacings between fittings must be specified at order time and once manufactured the fittings are fixed in place.

Universal Fibre Optics Ltd  
Home Place \ Coldstream  
TD12 4DT \ UK  
+44 (0)1890 883416  
[www.ufo.lighting](http://www.ufo.lighting)

Universal Fiber Optics USA LLC  
1749 Northgate Blvd  
Sarasota \ FL34234 \ USA  
941-343-8115  
[www.fiberopticleighting.com](http://www.fiberopticleighting.com)

UFO Licht GmbH  
Andreasstraße 20  
93059 Regensburg \ DE  
+49 (0)9491 955880  
[www.ufo-licht.de](http://www.ufo-licht.de)




# UFO Piccolo

# Track Extrusion Types

## Round Extrusion



## Rectangular Extrusion

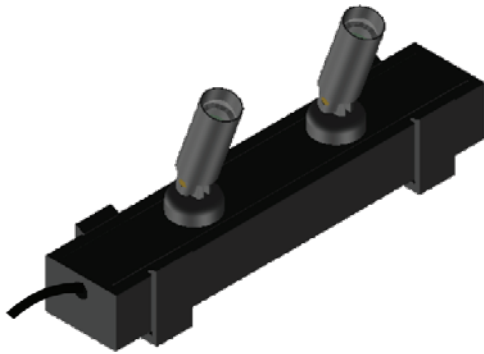

## Triangular Extrusion



### Luminaire Information

Light Source	White light LED
Operating Environment	Indoor use only
Material	Aluminium
Available Finishes	Anodised black or silver
Dimensions	Diameter: 9mm head / 12mm base Height: 31mm retracted / 37mm extended
Weight	11g
Securing Method	Back nut into extrusion
Articulation	360° Rotation / 130° Tilt

### LED Array Data

LED Type	Osram Oslon Square
LED Life (L70, B10)	>54,000 hours
Fitting Drive Current	150mA
Power Consumption	0.5W
Colour Temp. Options	3000K or 4000K
CRI	>96 CRI
Lumen Output	27lm
Fitting Luminous Efficacy	53lm/W
Driver Type	Constant current driver

### Optics Data

Type	User focusable optic
Focus Range	15° to 37°

### Extrusion Data

Material	Aluminium
Available Finishes	Black or silver anodised
Max. Extrusion Length	2800mm
Available Profiles	Round, rectangular or triangular
Max. Fittings per Length	16
Min. Fitting Centres	50mm
Mounting Method	Round or Rectangular profile: Mounting clips Triangular profile: Screwed to surface


### Dimming Options (Depending on specified driver)

Options	No dimming 0-10V dimming DALI dimming Remote potentiometer
---------	---


# UFO Piccolo

# Schematics & Codes


## Round Extrusion

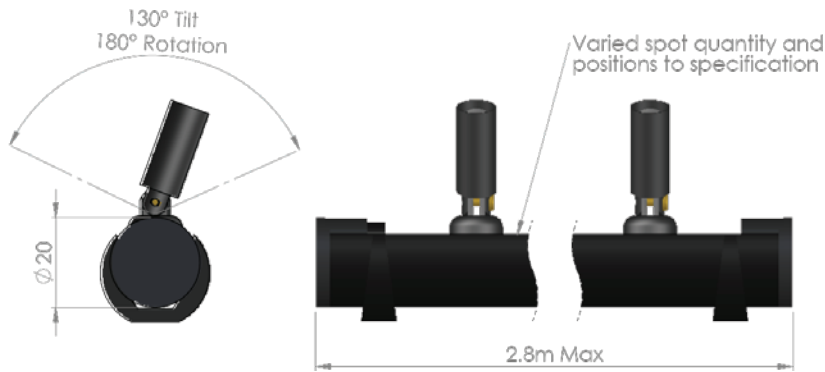

## Rectangular Extrusion

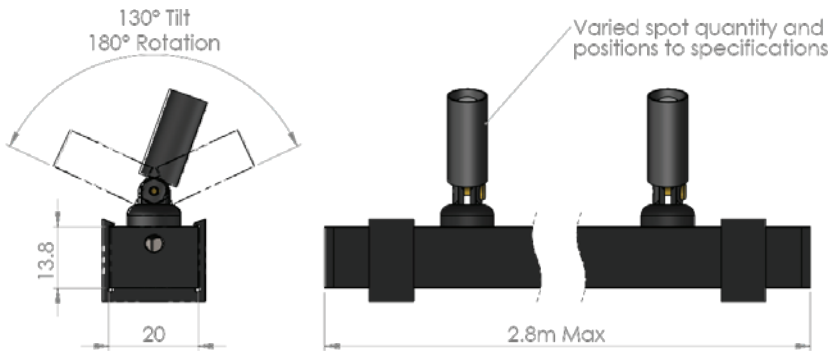

## Triangular Extrusion

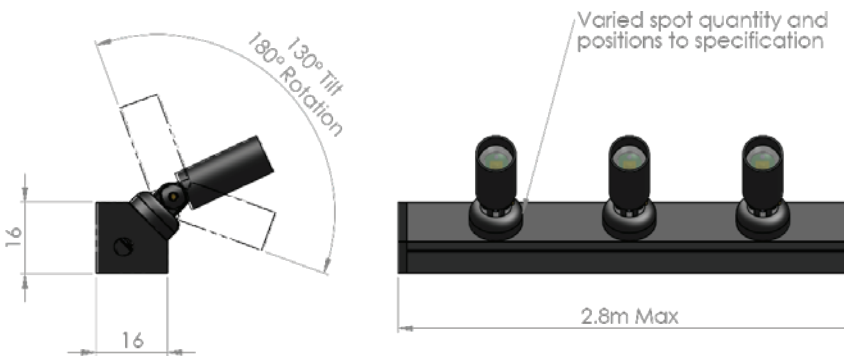

## Piccolo Ordering Code Selector

Piccolo Ordering Code Selector				Code
Model	UFO PICCOLO [UFO PCL]			UFO PCL
Colour Temp	3000K [30]	4000K [40]		[   ]
Extrusion Profile	Round [RD]	Rectangular [RE]	Triangular [TR]	[   ]
Finish	Black [BL]	Silver [SV]		[   ]
Extrusion Length	[ENTER VALUE IN MM]			[   ]
No. of Fittings	[ENTER NUMBER]			[   ]
Fitting Centres	[ENTER NUMBER]			[   ]