

PRODUCT SPECIFICATION SHEET

UFO Unidrive CC12



Rev. C2



The UFO Unidrive CC12 digital LED driver provides the smoothest flicker-free dimming to 1% light output.


Suitable for use with all of our constant current LED luminaires.

The CC12 is compatible with the 0-10V lighting control protocol, and works seamlessly together with LED modules, controls and intelligent luminaire elements.

Also suitable for use with our Unidim CCD12 dimmer for manual, potentiometer based dimming.

TECHNICAL INFORMATION

Product Code	DR-CC-12-AC-55-30-10VSI-CU
Input Voltage Range	120 - 250V AC
Rated Power	30W (other Wattages on request)
Output Current	150 - 1400mA (350mA as standard)
Output Voltage	2 - 55V DC
No. of LED Outputs	1
No. of LED Fittings	1 to 16
Dimming Functionality	0-10V, Manual Dimming
Compatibility	Constant Current Luminaires
Protection	OVP / SCP / OTP / OCP
Connection	Push-in Terminals
Weight	204g 0.45lb
Dimensions	210mm x 40mm x 33.5mm 8.27" x 1.57" x 1.32"
Accessories	Single remote dimmer - Unidim CC12 (UDM-P100-XX-XX-XX-D)

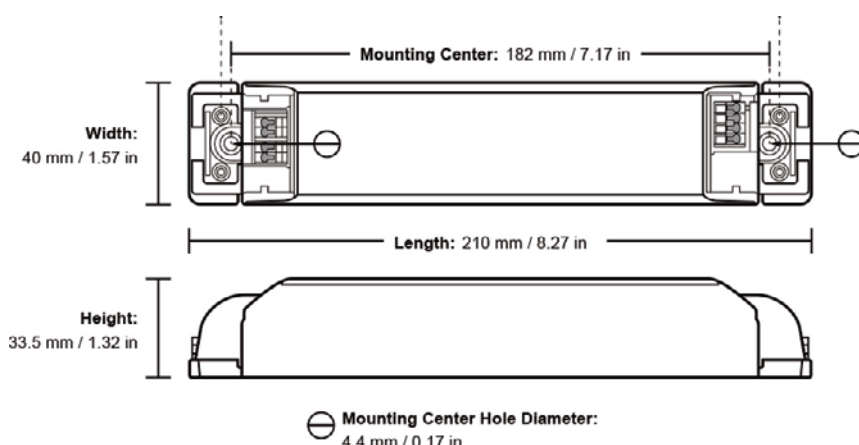

Universal Fibre Optics Ltd
Home Place \ Coldstream
TD12 4DT \ UK
+44 (0)1890 883416 \ www.ufo.lighting

Universal Fiber Optic Lighting USA, LLC
1749 Northgate Blvd
Sarasota \ FL34234 \ USA
941-343-8115 \ www.fiberopticlighting.com

UFO Licht GmbH
Andreasstraße 20
93059 Regensburg \ Deutschland
+49 (0)9491 955880 \ www.ufo-licht.de