

PRODUCT SPECIFICATION SHEET



LM2-1227-XT0980

Light efficacy:

53 Lumen/Watt

Colour Rendering Index:

CRI: 83.4

Colour temperature:

2659 K

Output: 594 lm

Peak: 3472 cd

Power: 11.1 W

Current: 0.481 A

Voltage: 23.1 V



Tracking number: n/a

Product name:


LM2-1227-XT0980

Description:

LM2, XTM, 12 Deg, 2700K, 09mm, 80 CRI, 500mA

Date and time:

06/12/2023 14:02:19

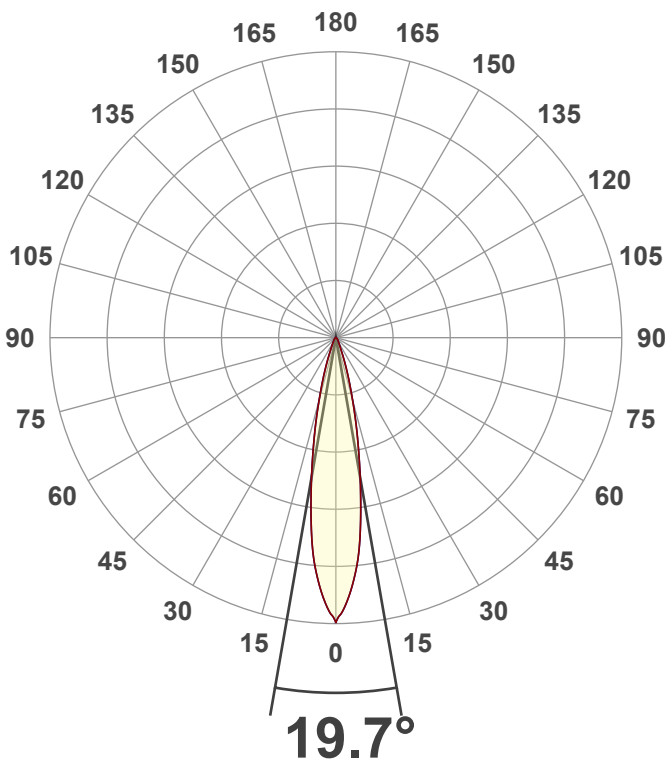


Beam angle



CIE 1931
x: 0.466
y: 0.415

Spectra

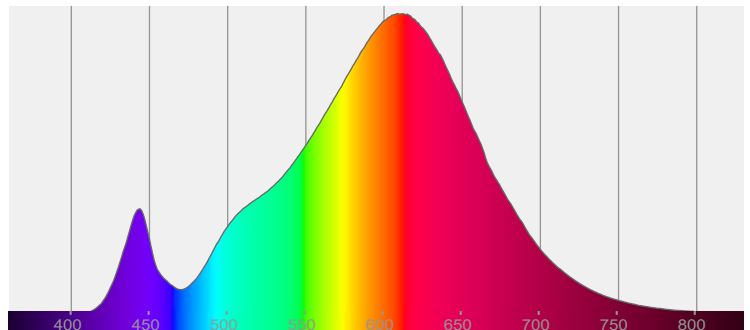


PRODUCT SPECIFICATION SHEET


LM2-1227-XT0980



Colour details

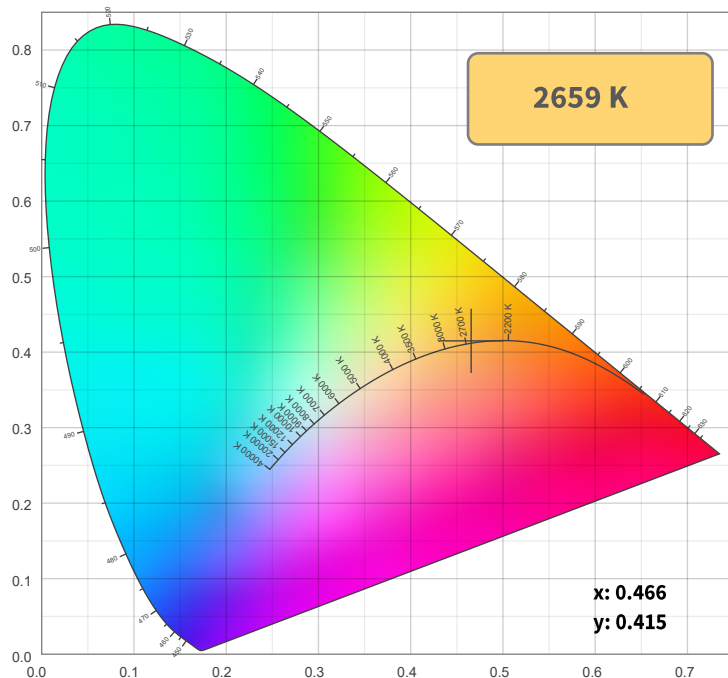

CIE 1931

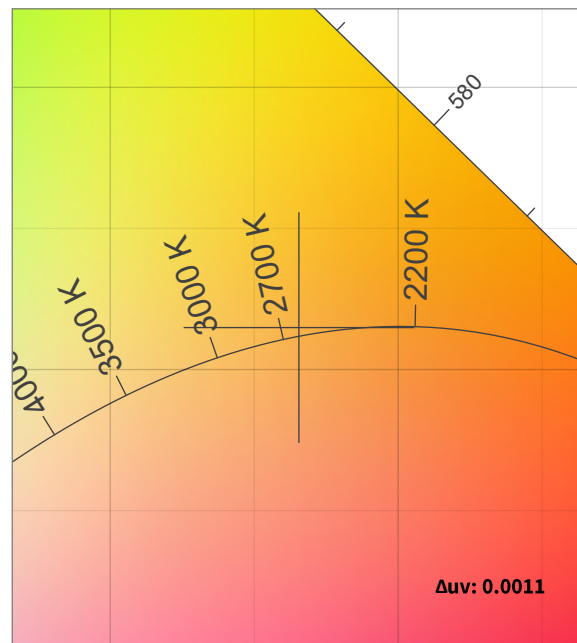

CIE 1931 ZOOM

CRI: 83.4 (R1-R8)

CRI R values, only R1-R8 are used to calculate final CRI value


R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
81.1	89.7	97.7	82.5	81.1	88.0	84.5	62.2	16.4	77.5	82.1	76.1	82.6	98.7	73.9

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
81.1	81.6	76.9	81.7	88.4	89.5	83.2	90.2	86.1	87.3	85.8	86.0	88.1	83.6	80.7	82.3

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
74.0	94.6	86.2	83.3	82.3	80.4	82.5	86.2	94.7	88.9	86.8	84.4	83.2	72.4	72.9

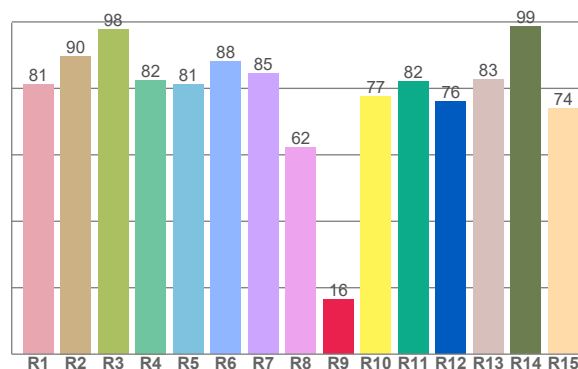

Colour parameters


Colour temperature	Colour rendering index	Red component	Colour fidelity	Colour gamut	Colour quality scale	Colour coordinate cie 1931	Colour coordinate cie 1931	Colour coordinate	Colour coordinate	Colour deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2659 K	83.4	16.4	84.2	98.4	82.1	0.466	0.415	0.264	0.353	0.0011

PRODUCT SPECIFICATION SHEET

LM2-1227-XT0980



Beam details

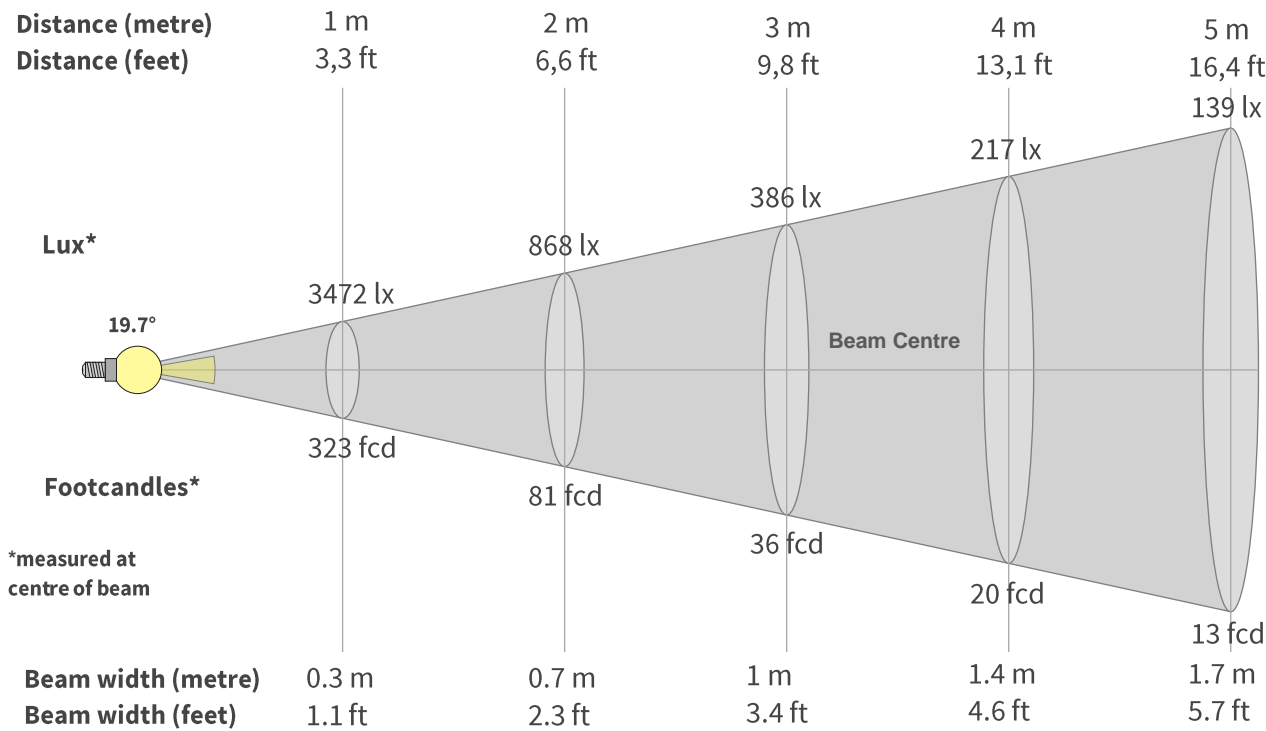

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
3472lx	868lx	386lx	217lx	139lx	96lx	71lx	54lx	43lx	35lx	29lx	24lx	21lx	18lx	15lx	14lx	12lx	11lx	10lx	9lx
322.5fcd	80.6fcd	35.8fcd	20.2fcd	12.9fcd	9fcd	6.6fcd	5fcd	4fcd	3.2fcd	2.7fcd	2.2fcd	1.9fcd	1.6fcd	1.4fcd	1.3fcd	1.1fcd	1fcd	0.9fcd	0.8fcd

The data presented in this document is generated using a popular combination of colour temperature and lens using a 350mA driver. We can provide data for all combinations of colour temperatures, drivers and lens options available for a specific fitting – please contact us for these details.

When information is requested for a specific combination there may be a short delay in supplying this as it may require us to set up a testing procedure for that particular combination. We will advise at the time of request how long it will take to supply the data.

Power figures provided have been generated based on the voltage and current to the fitting only and do not allow for any losses due to the driver. We measure this way because our fittings can be used with a variety of different drivers and are loaded differently. These driver variations affect the power factor and efficiency which distorts the figure provided for power consumption.

UFO recommend that a tolerance of +/-5% should be applied to all figures presented on these datasheets due to variances that can occur between different components. For example there may be slight ambient temperature variations during measuring or some slight variations in LED modules through the bin.